



Electrical Uniform Test Service Co., Ltd.
F2, building 25, Hengfeng Industrial Area, Zhoushi Rd, Baoan, Shenzhen, China
Tel.: +86-755 23225153, Fax: +86-755 29651921

Test Verification of Conformity

Reference Number: **E160601036A1**

Applicant: **SHENZHEN CYX TECHNOLOGY CO.,LTD**
2F, 6 buildings, GuangXi Industrial Zone, Industrial West Road,
LongSheng community, LongHua New District, ShenZhen

Description of Product:
Product Name : **OTT TV BOX**
Manufacturer : Same as applicant
Model No. : **A95X**
Brand Name : **CYX;NEXBOX**
Additional Model No. : **A1; A2;A3;A5;A6;A85;A95; A95C; A95X; A95H;A95K;D5; D6; D8; D9;D32; D35;
D36; D37; D51; D52; D53; D55;D56;D57;Y1; Y2;Y3;Y5;Y6;Y7;Y8; Y9; Y21;
Y22;Y23;Y25; Y26;Y27;Y28.**

Additional Brand Name : **N/A**
Ratings : **AC/DC adaptor**
Input: 100-240VAC, 50/60Hz, 0.3A; Output: 5VDC, 2000mA

Date of tests: **10 June 2016 to 08 July 2016**

Applicable Standard(s) with amendments:


- * **EN55022: 2010/AC: 2011**
- * **EN55024: 2010**
- * **EN61000-3-2: 2014**
- * **EN61000-3-3: 2013**

And, in accordance with the following directives:

Radio Equipment and Telecommunications Terminal Equipment Directive (2014/30/EU)

On the basis of the referenced test report(s), the sample(s) of the below product has been found to comply with the relevant harmonized standard(s) to the directive(s) listed on this verification at the time the tests were carried out. The manufacturer may indicate compliance to only the said directives by signing a DoC himself and may affix the CE marking to products identical to the tested sample(s) if the product complies with all CE marking directives that has the product in their scope. In addition, the manufacturer shall file and keep the documentation according to the rules of the applicable directive(s) and shall consider changes of the standards as they may occur. Additional requirements, additional directives and local laws may be applicable.



Signature: 
Name : William Chen
Position : EMC Manager
Date : 11 July 2016

EMC VERIFICATION SUMMARY

Report No.: E160601036A1

<p>Model: A95X Additional Models: A1; A2; A3; A5; A6; A85; A95; A95C; A95X; A95H; A95K; D5; D6; D8; D9; D32; D35; D36; D37; D51; D52; D53; D55; D56; D57; Y1; Y2; Y3; Y5; Y6; Y7; Y8; Y9; Y21; Y22; Y23; Y25; Y26; Y27; Y28. Product Description: OTT TV BOX</p>	<p>Applicant: SHENZHEN CYX TECHNOLOGY CO.,LTD 2F, 6 buildings, GuangXi Industrial Zone, Industrial West Road, LongSheng community, LongHua New District, ShenZhen</p> <p>Sample Receipt Date: 09 June 2016 Test Conducted Date: 10 June 2016 to 10 July 2016</p>																						
<p><input checked="" type="checkbox"/> 1st TEST <input type="checkbox"/> 2nd TEST</p>	<p>ALL TESTS WERE CONDUCTED IN ACCORDANCE WITH:</p> <p>*EN55022: 2010/AC : 2011 *EN55024: 2010 *EN61000-3-2: 2014 *EN61000-3-3: 2013</p>																						
<table border="1"> <thead> <tr> <th>Test Result</th> <th>OK</th> <th>Not OK</th> <th>See Remark (see page 2)</th> </tr> </thead> <tbody> <tr> <td>*EN55022: 2010/AC : 2011</td> <td><input checked="" type="checkbox"/></td> <td><input type="checkbox"/></td> <td><input type="checkbox"/></td> </tr> <tr> <td>*EN55024: 2010</td> <td><input checked="" type="checkbox"/></td> <td><input type="checkbox"/></td> <td><input type="checkbox"/></td> </tr> <tr> <td>*EN61000-3-2: 2014</td> <td><input checked="" type="checkbox"/></td> <td><input type="checkbox"/></td> <td><input checked="" type="checkbox"/></td> </tr> <tr> <td>*EN 61000-3-3: 2013</td> <td><input checked="" type="checkbox"/></td> <td><input type="checkbox"/></td> <td><input type="checkbox"/></td> </tr> </tbody> </table>	Test Result	OK	Not OK	See Remark (see page 2)	*EN55022: 2010/AC : 2011	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	*EN55024: 2010	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	*EN61000-3-2: 2014	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	*EN 61000-3-3: 2013	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			
Test Result	OK	Not OK	See Remark (see page 2)																				
*EN55022: 2010/AC : 2011	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>																				
*EN55024: 2010	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>																				
*EN61000-3-2: 2014	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>																				
*EN 61000-3-3: 2013	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>																				
<p>Remark: The highest frequency of the internal sources of the EUT is above 1GHz, the measurement shall be made up to 6GHz (Refer to EN 55022: 2010/AC: 2011 Clause 6.2 Limits above 1GHz).</p>																							
<p>When determining the test conclusion, the Measurement Uncertainty of test has been considered.</p>																							

Prepared and checked by:

Approved By:

Sign On File
Jim Zhang
Project Engineer



William Chen
EMC Manager
Date: 11 July 2016

This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification

EMC Results Conclusion (with Justification)

RE: EMC Testing Pursuant to R&TTE Directive 1999/5/EC Art. 3.1 (b) Performed On
The **OTT TV BOX**,
Model: A95X

We tested the **OTT TV BOX**, Model: A95X, to determine if it was in compliance with the relevant EN standards as marked on the EMC Verification Summary. We found that the unit met the requirement of EN55022, EN55024, EN61000-3-3, standards after modification.

The Models: A1; A2; A3; A5; A6; A85; A95; A95C; A95X; A95H; A95K; D5; D6; D8; D9; D32; D35; D36; D37; D51; D52; D53; D55; D56; D57; Y1; Y2; Y3; Y5; Y6; Y7; Y8; Y9 ; Y21; Y22; Y23; Y25; Y26; Y27; Y28. are the same as the Model: A95X in hardware aspect. The difference in model number serves as marketing strategy.

The production units are required to conform to the initial sample as received when the units are placed on the market.

Remark: Standards against which no testing has been conducted of the captioned model and the engineering judgement is stated as follows:

EN 61000-3-2: 2014

This product has power consumption 75W or less under normal operating conditions. It is therefore not likely to produce harmonics above the limits of the standard. The product is deemed to comply with the standard without any measurements.

LABORATORY MEASUREMENTS

Configuration Information

Equipment Under Test (EUT):	OTT TV BOX
Model:	A95X
Serial No.:	Not Labelled
Adaptor:	
Rating:	Input: 100-240VAC, 50/60Hz, 0.3A Output: 5VDC, 2000mA

Performance Criteria for Immunity

The performance criteria are referred to the test standard: EN 55024

Performance criteria A

During and after the test the EUT shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed below a minimum performance level specified by the manufacturer when the EUT is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the EUT if used as intended.

Performance criteria B

After the test, the EUT shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed, after the application of the phenomena below a performance level specified by the manufacturer, when the EUT is used as intended. The performance level may be replaced by a permissible loss of performance.

During the test, degradation of performance is allowed. However, no change of operating state or stored data is allowed to persist after the test.

If the minimum performance level (or the permissible performance loss) is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the EUT if used as intended.

Performance criteria C

During and after testing, a temporary loss of function is allowed, provided the function is selfrecoverable, or can be restored by the operation of the controls or cycling of the power to the EUT by the user in accordance with the manufacturer's instructions.

EN 55022 Radiated Scan

Used Test Equipment

Equipment	Manufacturer	Model No.	Cal. Date	Due Date
EMI Receiver	R & S	ESCI	07-Feb-2016	07-Feb-2017
Biconilog Antenna	ETS	3142C	28-Jun-2016	28-Jun-2017
Horn Antenna	ETS	3115	17-Oct-2016	17-Oct-2017
EMI Spectrum Analyzer	R & S	FSP30	08-Jun-2016	08-Jun-2017
Anechoic Chamber	ETS	RFD-F/A-100	19-Apr-2016	19-Apr-2017
Preamplifier	Agilent	8449B	07-Feb-2016	07-Feb-2017



- Notes:
1. Peak detector quick scan is showed on the graph and final quasi-peak detector data is measured corresponding to relevant limit and recorded in the data table for 30MHz~1000MHz; Peak and average detector quick scan are showed on the graph and final Peak and average detector data are measured for Above 1GHz, the worst-case is recorded in the following graph and table.
 2. Negative sign (–) in the margin column signify levels below the limit.
 3. Frequency range scanned: 30MHz to 6000MHz.
 4. Only emissions significantly above equipment noise floor are reported.
 5. Uncertainty: $\pm 4.8\text{dB}$ at a level of confidence of 95%.

Model: A95X
Worst Case Operating Mode: LAN play mode

Graphic

Radiated Emissions Pursuant to EN55022: Class B Emissions Requirement (30M-1G)

Horizontal & Vertical

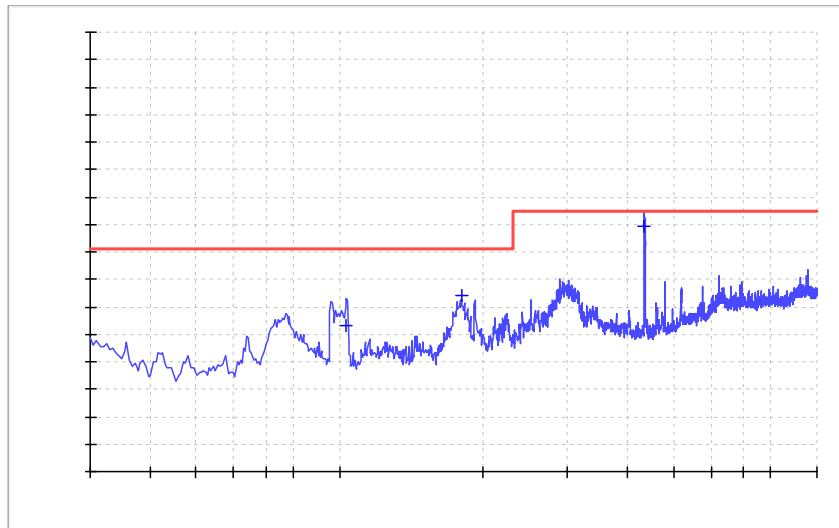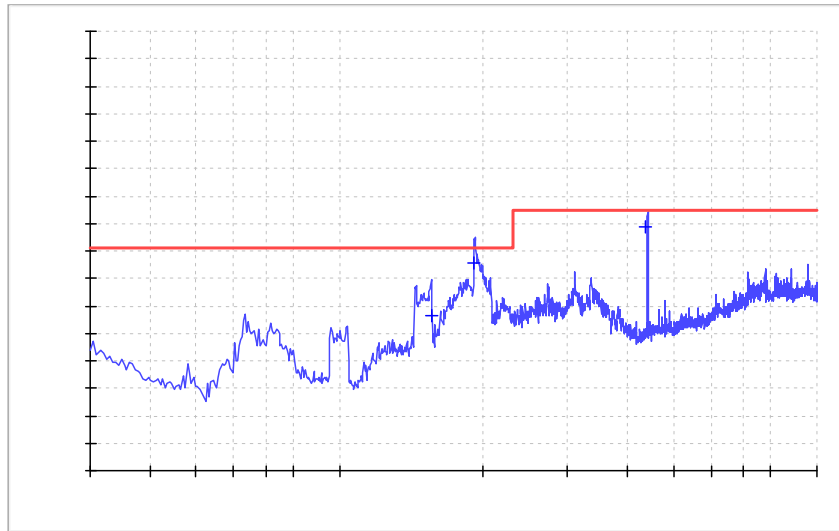


Model: A95X
Worst Case Operating Mode: LAN play mode


Graphic

Radiated Emissions
Pursuant to EN55022: Class B Emissions Requirement (1G-6G)

Horizontal

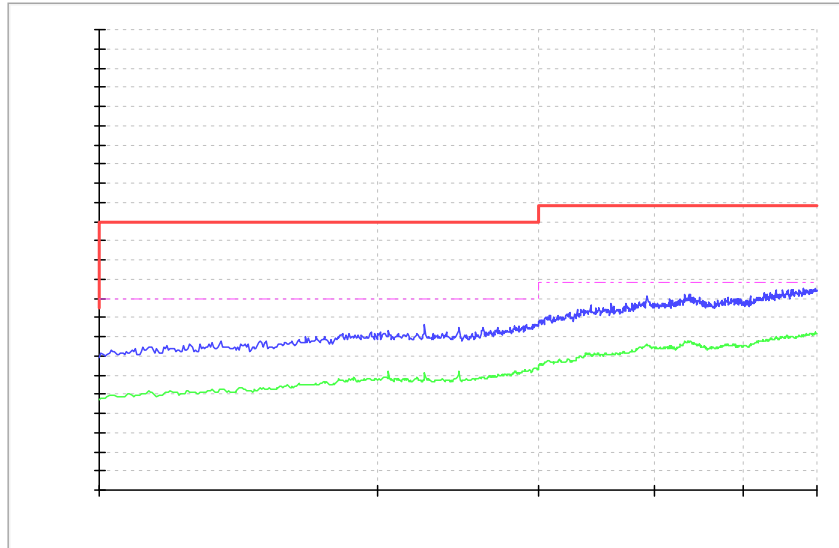

Vertical

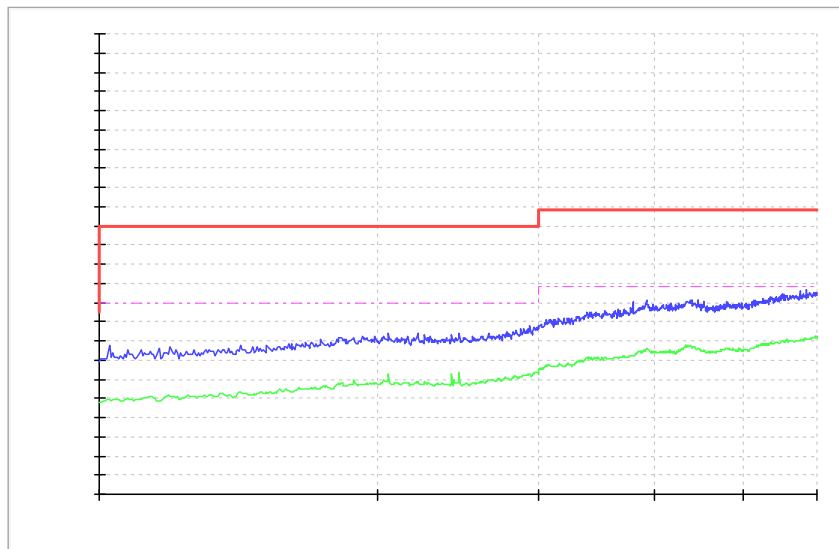

Model: A95X
 Worst Case Operating Mode: LAN play mode

Data Table

**Radiated Emissions
 Pursuant to EN55022: Class B Emissions Requirement (30M-1G)**

Polarization	Frequency (MHz)	Net at 3m (dBµV/m)	Calculated Net at 10m (dBµV/m)	Limit at 10m (dBµV/m)	Margin (dB)
H	155.615	28.2	17.7	30.0	-12.3
H	191.673	37.8	27.3	30.0	-2.7
H	438.285	44.3	33.8	37.0	-3.2
V	103.235	26.5	16.0	30.0	-14.0
V	179.865	32.2	21.7	30.0	-8.3
V	435.260	44.7	34.2	37.0	-2.8

No emissions significantly above equipment noise floor.

Pursuant to EN55022: Class B Emissions Requirement (1G-6G)

Polarization	Frequency (MHz)	Net at 3m Average (dBµV/m)	Net at 3m Peak (dBµV/m)	Limit at 3m Average (dBµV/m)	Limit at 3m Peak (dBµV/m)	Margin Average (dBµV/m)	Margin Peak (dBµV/m)
\	\	\	\	\	\	\	\

No emissions significantly above equipment noise floor.

Model: A95X

Worst Case Operating Mode: LAN play mode

EN55022 RFI Voltage Test

Used Test Equipment


Equipment	Manufacturer	Model No.	Cal. Date	Due Date
LISN	R & S	ENV216	1-Nov-2015	1-Nov-2016
LISN	R & S	ENV216	24-Jun-2016	24-Jun-2017
EMI Test Receiver	R&S	ESCI	1-Nov-2015	1-Nov-2016
Shielding Room	ETS	RFD-100	23-Aug-2015	23-Aug-2016

- Notes:
1. Peak and average detector quick scan are showed on the graph and final quasi-peak and average detector data are measured, the worst-case is recorded in the following graph and table.
 2. Negative sign (–) in the margin column signify levels below the limit.
 3. Frequency range scanned: 150 kHz to 30MHz.
 4. Only emissions significantly above equipment noise floor are reported.
 5. Uncertainty: $\pm 3.6\text{dB}$ at a level of confidence of 95%.


Model: A95X
Worst Case Operating Mode: LAN play mode
Phase: Live / Neutral

**Graphic
RFI Voltage Test
Pursuant to EN55022: Class B Emissions Requirement**

Live Line

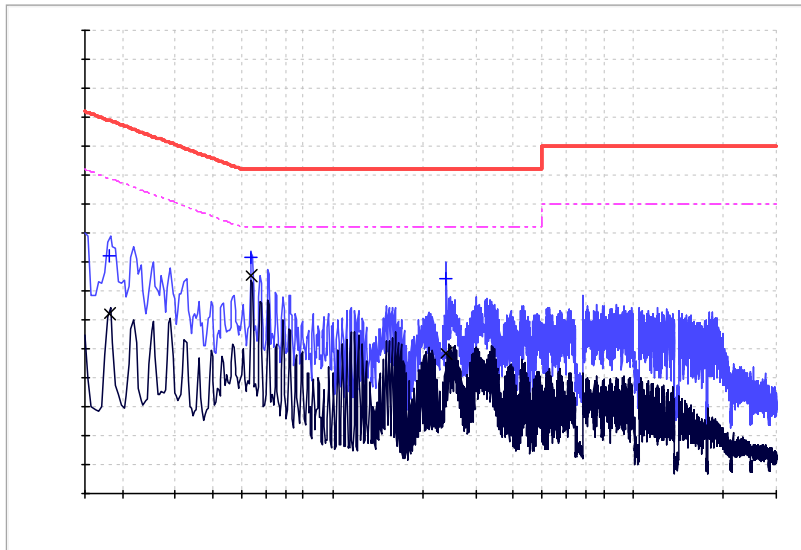

Neutral Line

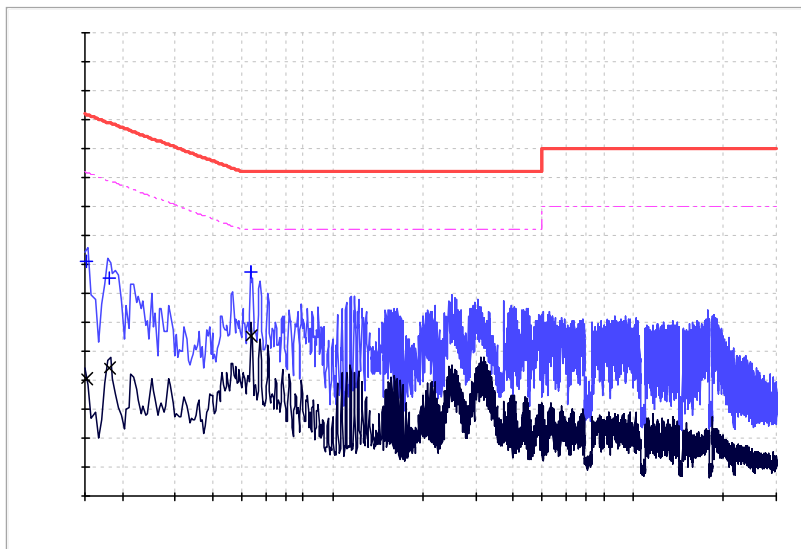

Model: A95X
 Worst Case Operating Mode: LAN play mode
 Phase: Live / Neutral

**Data Table
 RFI Voltage Test
 Pursuant to EN55022: Class B Emissions Requirement**

Live Line

Frequency (MHz)	Quasi-Peak		Average	
	Disturbance level dB(μV)	Permitted limit dB(μV)	Disturbance level dB(μV)	Permitted limit dB(μV)
0.181500	41.1	64.4	31.0	54.4
0.538000	40.9	56.0	37.6	46.0
2.394000	37.0	56.0	24.3	46.0

Neutral Line

Frequency (MHz)	Quasi-Peak		Average	
	Disturbance level dB(μV)	Permitted limit dB(μV)	Disturbance level dB(μV)	Permitted limit dB(μV)
0.151400	40.5	65.9	20.2	55.9
0.181500	37.6	64.4	22.2	54.4
0.534000	38.7	56.0	27.6	46.0


No emissions significantly above equipment noise floor.

Model: A95X
 Worst Case Operating Mode: LAN play
 Test port: Telecommunication port

Graphic & Data Table

RFI Voltage Test Pursuant to EN55022: Class B: Emissions Requirement

Telecommunication Line

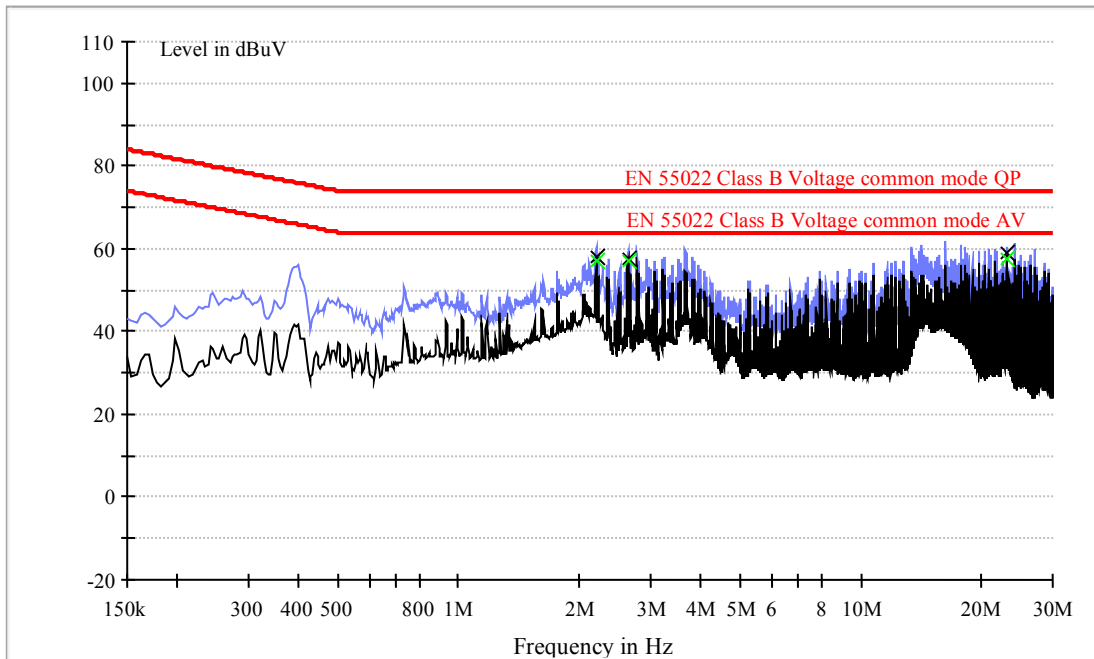

Result Table QP

Frequency (MHz)	QuasiPeak (dB μV)	Corr. (dB)	Margin (dB)	Limit (dB μV)
2.198	57.8	9.6	16.2	74.0
2.638	57.5	9.6	16.5	74.0
23.130	59.1	9.6	14.9	74.0

Result Table AV

Frequency (MHz)	Average (dB μV)	Corr. (dB)	Margin (dB)	Limit (dB μV)
2.198	57.1	9.6	6.9	64.0
2.638	57.2	9.6	6.8	64.0
23.130	57.4	9.6	6.6	64.0

EN61000-3-3 Voltage Fluctuations

Used Test Equipment

Equipment	Manufacturer	Model No.	Cal. Date	Due Date
Compliance Test System	California Instruments	5001iX-CTS-400	07-Feb-2016	07-Feb-2017
Power Analyzer and Conditioning System	California Instruments	PACS-1	07-Feb-2016	07-Feb-2017

Note 1. Uncertainty: 0.25% at a level of confidence of 95%.

2. The test result consisting of worst-case was attached in the following pages.

Model: A95X
 Worst Case Operating Mode: USB Play


Flicker Test Summary per EN/IEC61000-3-3 (Run time)

Test Result: Pass

Status: Test Completed

P_{st} and limit line

European Limits

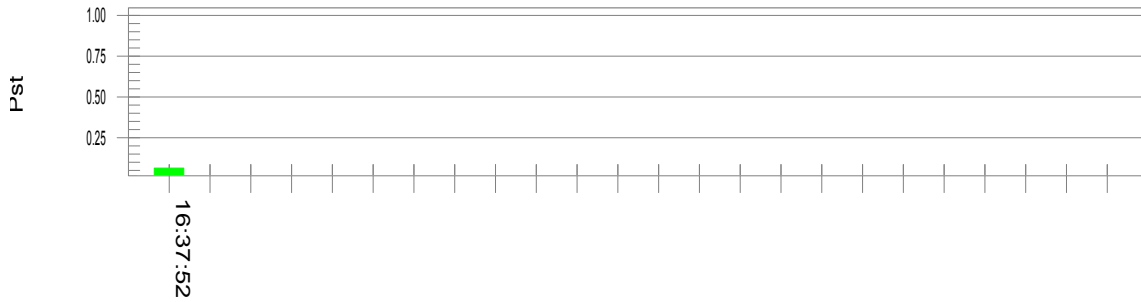

Parameter values recorded during the test:

Vrms at the end of test (Volt):	229.67			
Highest dt (%):	0.00	Test limit (%):	3.30	Pass
Time(mS) > dt:	0.0	Test limit (mS):	500.0	Pass
Highest dc (%):	0.00	Test limit (%):	3.30	Pass
Highest dmax (%):	0.00	Test limit (%):	4.00	Pass
Highest Pst (10 min. period):	0.064	Test limit:	1.000	Pass

EN61000-4-2 Electrostatic Discharge

Test Summary (Pursuant to EN55024)

Basic Standard:	IEC 61000-4-2: 2008
Port:	Enclosure
Required Performance Criterion:	B
Limit:	±8.0kV (Air Discharge)
	±4.0kV (Contact Discharge)
	±4.0kV (Indirect Contact Discharge)
Time Between Each Discharge:	1 second
Temperature:	25.4°C
Relative Humidity:	47.0%
Test Mode:	LAN play USB play SD Card play
Test Setup:	Table-top
Test of Post-Installation:	N/A

Used Test Equipment

Equipment	Manufacturer	Model No.	Cal. Date	Due Date
ESD Simulator	Teseq	NSG 435	12-Nov-2015	12-Nov-2016

Test Results
EN61000-4-2
Electrostatic Discharge

Discharge Type	No. of Discharge	Applied Voltage	Result (Pursuant to EN55024, Criterion B)
Contact Discharge	50	±4kV	OK
Air Discharge	25	±8kV	OK
Indirect HCP Discharge	50	±4kV	OK
Indirect VCP Discharge	50	±4kV	OK

Additional Information

No observable change

EUT stopped operation and could / could not be reset by operator at [] V, [] of ESD.

EUT was in abnormal operation:
– Operation mode was changed from [] to [] at [] V, [] of ESD.

In all mode, the sound noise and screen flash occur during test, but it can be resumed by itself after test.

EN61000-4-3 Radiated Immunity

Test Summary (Pursuant to EN55024)

Basic Standard:	IEC 61000-4-3: 2006 + A1: 2007 + A2: 2010
Port:	Enclosure
Required Performance Criterion:	A
Limit:	3.0V/m (rms)
Test Modulation:	1kHz, 80% AM
Frequency:	80MHz to 1000MHz
Dwell Time:	1s
Frequency Step:	1%
Temperature:	25.1°C
Relative Humidity:	49.8%
Test Facility:	Full Anechoic Chamber
Antenna Polarization:	Horizontal and Vertical
Type of Antenna:	Biconical / Log-periodic
Test Distance:	3 meters
Test Mode:	LAN play USB play SD Card play
Test Setup:	Table-top

Used Test Equipment

Equipment	Manufacturer	Model No.	Cal. Date	Due Date
BiConiLog Antenna	ETS	3142C	28 Jun 2016	28 Jun 2017
Signal Generator	R&S	SML03	20-May-2015	20-May-2016
Amplifier	PRANA	AP32 MT215	7-Feb-2016	7-Feb-2017
Anechoic Chamber	ETS	RFD-F/A-100	8-Nov-2015	8-Nov-2016

Test Results

EN61000-4-3 Radiated Immunity

Frequency (MHz)	Exposed Side	Field Strength V/m (rms)	Result (Pursuant to EN55024, Criterion A)
80 to 1000	Front	3	OK
80 to 1000	Left	3	OK
80 to 1000	Rear	3	OK
80 to 1000	Right	3	OK

Additional Information

No observable change

EUT stopped operation and could / could not be reset by operator at Freq. _____ of Radiated Immunity.

EUT was in abnormal operation:
 – Operation mode was changed from _____ to _____ at Freq. _____ of Radiated Immunity.

EN61000-4-4
Electrical Fast Transient / Burst

Test Summary (Pursuant to EN55024)

Basic Standard:	IEC 61000-4-4: 2004	
Port:	AC Power Lines	DC Power Lines, Signal Lines and Control Lines
Required Performance Criterion:	B	
Limit:	±1.0kV	±0.5kV
Test Duration:	1 minute	
Test Mode:	LAN play USB play SD Card play	
Temperature:	22°C	
Relative Humidity:	64%	
Test Setup:	Table-top	
Generator Drive:	Internal	
Sequence of Application:	Multiple	

Used Test Equipment

Equipment	Manufacturer	Model No.	Cal. Date	Due Date
Compact Immunity Tester	Haefely	ECOMPACT 4	07-Feb-2016	07-Feb-2017

Test Results

EN61000-4-4 Electrical Fast Transient / Burst

Port	Level	Polarity	Result (Pursuant to EN55024, Criterion B)
AC Power Lines	1kV	+	OK
	1kV	-	OK
DC Power Lines	0.5kV	+	OK
	0.5kV	-	OK
Signal Lines	0.5kV	+	OK
	0.5kV	-	OK
Control Lines	0.5kV	+	N/A
	0.5kV	-	N/A

- Additional Information
 - No observable change
 - EUT stopped operation and could / could not be reset by operator at [] V of Fast Transient.
 - EUT was in abnormal operation:
 - Operation mode was changed from [] to [] at [] V of Fast Transient.
 - In all modes the sound pops during the test, but it can be resumed by itself. _____

EN61000-4-5 Surge Immunity

Test Summary (Pursuant to EN55024)

Basic Standard:	IEC 61000-4-5: 2005		
Port:	AC Power Lines		
	Phase and Neutral	Phase and Earth	Neutral and Earth
Limit:	5 Positive and 5 Negative Surges		
	±1kV	±2kV	±2kV
Generator Impedance:	2ohm	12ohm	12ohm
Required Performance Criterion:	B		
Repetition Rate:	1 minute		
Test Mode:	LAN play USB play SD Card play		
Temperature:	22°C		
Relative Humidity:	64%		
Test Setup:	Table-top		
Surge Generator Trigger:	Internal		
Installation Condition:	Class 3: Electrical environment where cables run in parallel.		
Phase Angle:	0°, 90°, 180°, 270°		

Used Test Equipment

Equipment	Manufacturer	Model No.	Cal. Date	Due Date
Compact Immunity Tester	Haefely	ECOMPACT 4	07-Feb-2016	07-Feb-2017

Test Results**EN61000-4-5
Surge Immunity**

Level	Result (Pursuant to EN55024, Criterion B)
Between Phase and Neutral: ±1kV	OK
Between Phase and Earth: ±2kV	N/A
Between Neutral and Earth: ±2kV	N/A

 Additional Information No observable change EUT stopped operation and could / could not be reset by operator at [] V of Surge. EUT was in abnormal operation:
– Operation mode was changed from [] to [] at [] V of Surge. In all modes the sound pops during the test, but it can be resumed by itself._

EN61000-4-6
Injected Current (0.15MHz to 80MHz)

Test Summary (Pursuant to EN55024)

Basic Standard:	IEC 61000-4-6: 2008
Port:	AC Power Lines, DC Power Lines, Signal Lines and Control Lines
Required Performance Criterion:	A
Limit:	3.0V (rms)
Test Modulation:	1kHz, 80% AM
Frequency:	0.15MHz to 80MHz
Dwell Time:	1s
Frequency Step:	1%
Temperature:	24.8°C
Relative Humidity:	50.8%
Coupling Factor of CDN:	-1.0dB ~ -1.7dB
Test Mode:	LAN play USB play SD Card play
Test Setup:	Table-top
Equipment Under Test (EUT):	Single Unit

Used Test Equipment

Equipment	Manufacturer	Model No.	Cal. Date	Due Date
Signal Generator	Aeroflex	2023A	07-Feb-2016	07-Feb-2017
Amplifier	AR-WORLDWIDE	75A250	07-Feb-2016	07-Feb-2017
Attenuator	AR-WORLDWIDE	6dB/50FH-006-100	07-Feb-2016	07-Feb-2017
Coupling-Decoupling Network	LUTHI	CDN L-801 M2/M3	07-Feb-2016	07-Feb-2017

Test Results

EN61000-4-6 Injected Current (0.15MHz to 80MHz)

Port	Frequency (MHz)	Level	Result (Pursuant to EN55024, Criterion A)
AC Power Lines	0.15 to 80	3V (rms)	OK
DC Power Lines	0.15 to 80	3V (rms)	OK
Signal Lines	0.15 to 80	3V (rms)	OK
Control Lines	0.15 to 80	3V (rms)	N/A

Additional Information

No observable change

EUT stopped operation and could / could not be reset by operator at [] V of Injected Current.

EUT was in abnormal operation:
 – Operation mode was changed from [] to [] at [] V of Injected Current.

EN61000-4-11 Voltage Dips and Interruptions

Test Summary (Pursuant to EN55024)

Basic Standard:	IEC 61000-4-11: 2004		
Port:	AC Power Lines		
Limit:	Test Level in %UT	Duration(s)	Required Performance Criterion
	0	0.01	B
	70	0.5	C
	0	5	C
No. of Dips / Interruptions:	3		
Temperature:	22°C		
Relative Humidity:	64%		
Test Mode:	LAN play USB play SD Card play		
Test Setup:	Table-top		

U_T is the rated voltage for the equipment.

Used Test Equipment

Equipment	Manufacturer	Model No.	Cal. Date	Due Date
Compact Immunity Tester	Haefely	ECOMPACT 4	07-Feb-2016	07-Feb-2017

Test Results

EN61000-4-11 Voltage Dips and Interruptions

Test Condition		Result (Pursuant to EN55024, Criterion B)
Test Level in %U _T	Duration(s)	
0	0.01	OK

Test Condition		Result (Pursuant to EN55024, Criterion C)
Test Level in %U _T	Duration(s)	
70	0.5	OK
0	5	OK

Additional Information

No observable change

EUT stopped operation and could be reset by itself at test level of Interrupt.

EUT was in abnormal operation:

- Operation mode was changed from Charging to Uncharging at test level 0%U_T, 250Cycles of Interrupt.


External Photo





Internal Photo



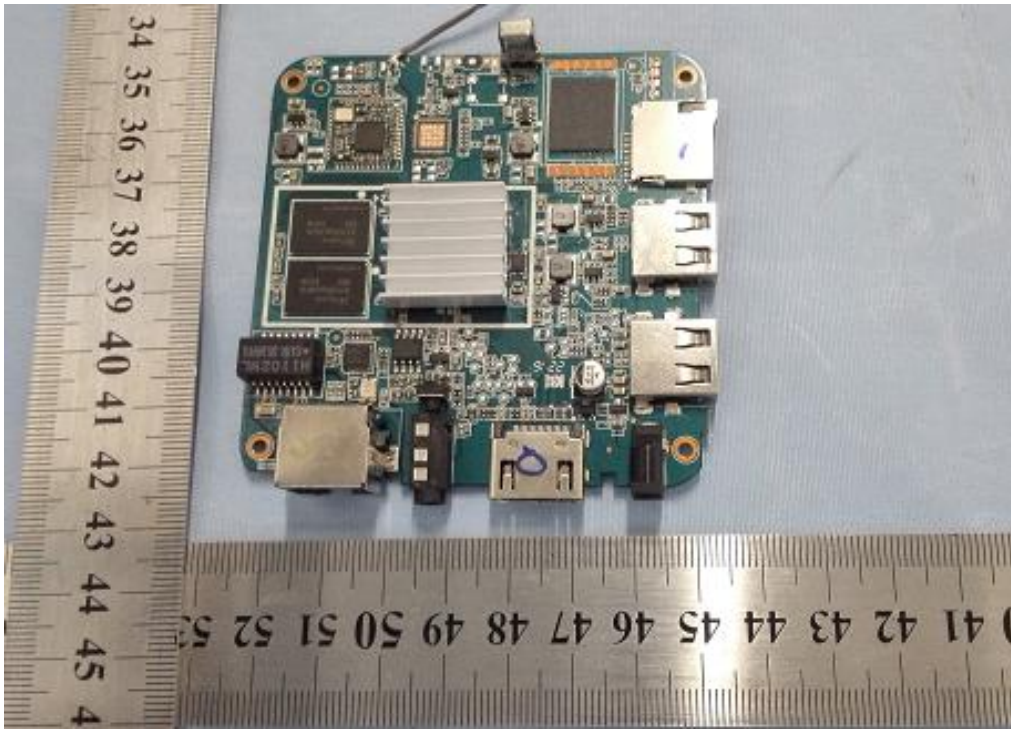

Adapter Photo



- End of report -